 -50°C ... +300°C ^ +700°C
 -50°C ... +300°C

Wickelband / Tape
 Klebeband / Wrapping Tape

FLEXAhightemp

FLEXAhightemp Wickelband

Band mit fester Webkante

Material
 Fireblocker-Beschichtung
 Aramid oder Calciumsilikat

FLEXAhightemp Tape

Tape with tightly woven selvedges

Material
 fireblocker coating
 aramid or calcium-silikate

FLEXA No.	Breite width	Stärke thickness		
rot red	mm	mm	kg/m	m
2061.899.025	25	2 - 3	0,040	10
2061.899.050	50	2 - 3	0,084	10
2061.899.075	75	2 - 3	0,122	10
2061.899.100	100	2 - 3	0,165	10



ELECTRO-PRODUCTS CORP.

1-800-350-7937 | www.ibisep.com | info@ibisep.com

FLEXAhightemp Klebeband

zum Befestigen von
Feuerschutzschläuchen


Material
 Silikon-Beschichtung

FLEXAhightemp Wrapping Tape

for fastening of
fire protection conduits

Material
 silicone coating

FLEXA No.	Breite width		
rot red	mm	kg/m	m
2061.898.025	25	0,020	9

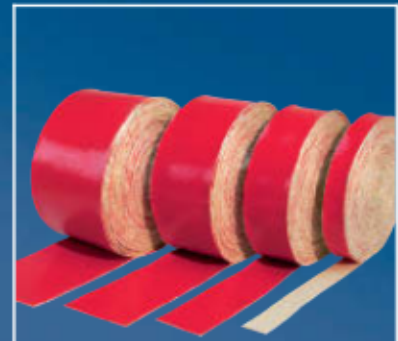

Portrait

ROHRflex
Wellenschlauch

FLEXAquick
Anschluss-
technik

Metall
Schläuche

Metall
Schläuche
-dicht-

Kunststoff
Schläuche

Spezial
Schläuche

flexa