

KSM

Kabelverschraubung

Cable gland

 IP 68 ... 5 bar
 -20°C ... +100°C ^ +130°C

MATERIAL

Gehäuse Messing vernickelt
Dichtung Perbunan

MATERIAL

body nickel-plated brass
sealing perbunan

EIGENSCHAFTEN


- beständig gegen Öl
- hohe Stabilität

PROPERTIES

- resistant against oil
- high stability



ELECTRO-PRODUCTS CORP.

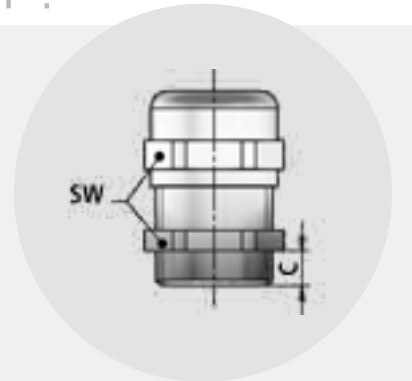

FLEXA No.



mm

C
mmSW
mmSt.
pcs.

KSM-M

Metr.
EN 60423

FLEXA No.	Metr. EN 60423	mm	C mm	SW mm	St. pcs.
0522.001.012	M 12 x 1,5	3,0 - 6,0	5,0	14	100
0522.001.016	M 16 x 1,5	5,0 - 9,0	5,0	17	100
0522.001.020	M 20 x 1,5	9,0 - 13,0	6,0	22	100
0522.001.025	M 25 x 1,5	11,0 - 16,0	7,0	27	50
0522.001.032	M 32 x 1,5	14,0 - 21,0	8,0	34	25
0522.001.040	M 40 x 1,5	19,0 - 27,0	8,0	43	10
0522.001.050*	M 50 x 1,5	24,0 - 35,0	9,0	55	5

KSM-P

PG
DIN 40430

FLEXA No.	PG DIN 40430	mm	C mm	SW mm	St. pcs.
0522.000.001	7	3,0 - 6,5	5,0	14	100
0522.000.003	9	4,0 - 8,0	6,0	17	100
0522.000.006	11	5,0 - 10,0	6,0	20	50
0522.000.010	13,5	6,0 - 12,0	6,5	22	50
0522.000.013	16	10,0 - 14,0	6,5	24	50
0522.000.015	21	13,0 - 18,0	7,0	30	50
0522.000.016	29	18,0 - 25,0	8,0	40	25
0522.000.017	36	24,0 - 32,0	9,0	50	10
0522.000.019	48	34,0 - 44,0	10,0	64	5

* Lieferzeit auf Anfrage Delivery time on request