

# ROHRflex® MULTI

Vollkunststoff-Wellschlauch  
Innen und außen gewellt  
Kabelsammler für große  
Kabelmengen

Corrugated all-plastic tubing  
Internally and externally corrugated  
cable buncher for large  
quantity of cables

**HB [UL 94]**  
 -40°C ... +120°C ^ +150°C PA 6  
 -50°C ... +100°C ^ +130°C PA 12

## MATERIAL

ROHRflex® MULTI: Kunststoff PA 6  
ROHRflex® MULTI: Kunststoff PA 12

## MATERIAL

ROHRflex® MULTI: plastics PA 6  
ROHRflex® MULTI: plastics PA 12

UL 1696  
UR file E86359  
CSA 22.2  
File No. 227.3-05



## EIGENSCHAFTEN

- trittfest
- luft- und flüssigkeitsdicht
- silikon-, cadmium- und halogenfrei
- flammwidrig
- UV-beständig [schwarz]
- HB nach UL 94

ROHRflex® MULTI PA 6

- ölbeständig bis +80° C
- benzinbeständig
- weitgehend säure- und lösungsmittelbeständig

ROHRflex® MULTI PA 12

- öl- und benzinbeständig
- weitgehend säure- und lösungsmittelbeständig
- besonders geeignet bei häufigem Biegewechsel

## PROPERTIES

- non-crush
- air- and liquid-tight
- free of silicone/cadmium/halogen
- flame retarding
- UV-resistant [black]
- HB acc. to UL 94

ROHRflex® MULTI PA 6

- oil resistant up to +80° C
- benzine resistant
- widely resistant to acid and solvents

ROHRflex® MULTI PA 12

- oil and benzine resistant
- widely resistant to acids and solvents
- especially suitable for applications with frequently reversed bending cycles

## Passende Anschlüsse


Suitable connectors	Seite   page	
Multi-GFP	03.42	IP 54
Multi-WFP	03.43	IP 54

## ANWENDUNGSGEBIETE

- Maschinen- und Anlagenbau
- Fahrzeugbau
- Schienenfahrzeuge
- Schiffsbau
- Automation
- Elektroanlagen

## APPLICATION

- machine and plant constructions
- automotive
- railway industry
- shipbuilding
- automation
- electrical installations

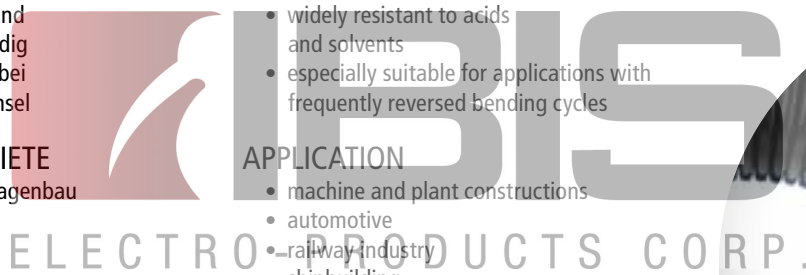

FLEXA No.

FLEXA No.

NW  
ID



schwarz black

grau grey

ø

mm

stat

dyn

kg/m

m

### ROHRFLEX® MULTI PA 6

0206.202.056		56	56,3 x 67,2	130	270	0,460	10
0206.202.070	0206.201.070	70	66,5 x 79,2	170	350	0,500	10
0206.202.095	0206.201.095	95	91,0 x 106,0	225	450	0,950	10

### ROHRFLEX® MULTI PA 12

0207.202.056		56	56,3 x 67,2	130	270	0,400	10
0207.202.070	0207.201.070	70	66,5 x 79,2	170	350	0,460	10
0207.202.095	0207.201.095	95	91,0 x 106,0	225	450	0,850	10

